

46" OPS Display VM460A-A-CMS

Features

- 46 inch wide viewing angle display
- Support Resolution: 1920x1080
- Brightness 400cd/m2
- Compatible with OPS module
- Support Landscape & Portrait

*Note

This 46" OPS Display is compliant with OPS (Open Pluggable Specification) that is promoted by Intel. Based on OPS standard, this OPS Display can be inserted into any OPS module to satisfy customers' flexible requirements.




Model Name:VM46A-A-CMS

Specifications		
Viewable Size Image		46"(16:9)
Active Area(mm)		1018.08x572.67
Pixel Pitch(mm)		0.53025(H)x0.53025(V)
Resolution		1920x1080
Brightness		400 cd/m2
Contrast Ratio		4000:1 (typ)
Display Color		16.7M (8bit/colors)
Viewing Angle		Up 89 / Down 89 / Left 89 / Right 89
Frequency	Horizontal	15.625/15.734, 31.5-91.1KHz(Analog) / 31.5-91.1KHz(Digital)
	Vertical	50-85Hz(Analog) / 50-85Hz(Digital)
Display I/O Interface		
Input Signal	PC	Mini D-sub 15pin
		DVI-D(with HDCP)
	Video	Composite(BNC type)
		Component (BNC x3)
		HDMI (with HDCP)
	Audio	RCA L/R: 2Input
		Stereo Mini Jack: 1Input
	Control	D-sub 9Pin (RS232C)
		LAN(RJ45)
Output Signal	PC	Mini D-sub 15pin
	Video	Composite(BNC type)
	Audio	RCA L/R: 1 Output
		Speaker Output: External SPKJack 10W + 10W (w/ Push button to switch Int./Ext.)
	Control	D-sub 9Pin (RS232C)
Environment		
Operating Temp		0°C ~45°C
Operating Humidity		20-80% (without condensation)
Storage Temp		-20-60degC
Storage Humidity		10-90% (without condensation)
Others		
Internal SPK		10W x2
Power Requirement		110~240V AC-in
OPS Slot		Yes
Physical Characteristics		1091.1(W) x 645.7(H) x 120.1(D)
Weight	Without Stand	26KG
	With Stand	26.5KG
Kensington Lock		Yes
Option		Stand

46" OPS Display VM460A-A-CMS

Dimension

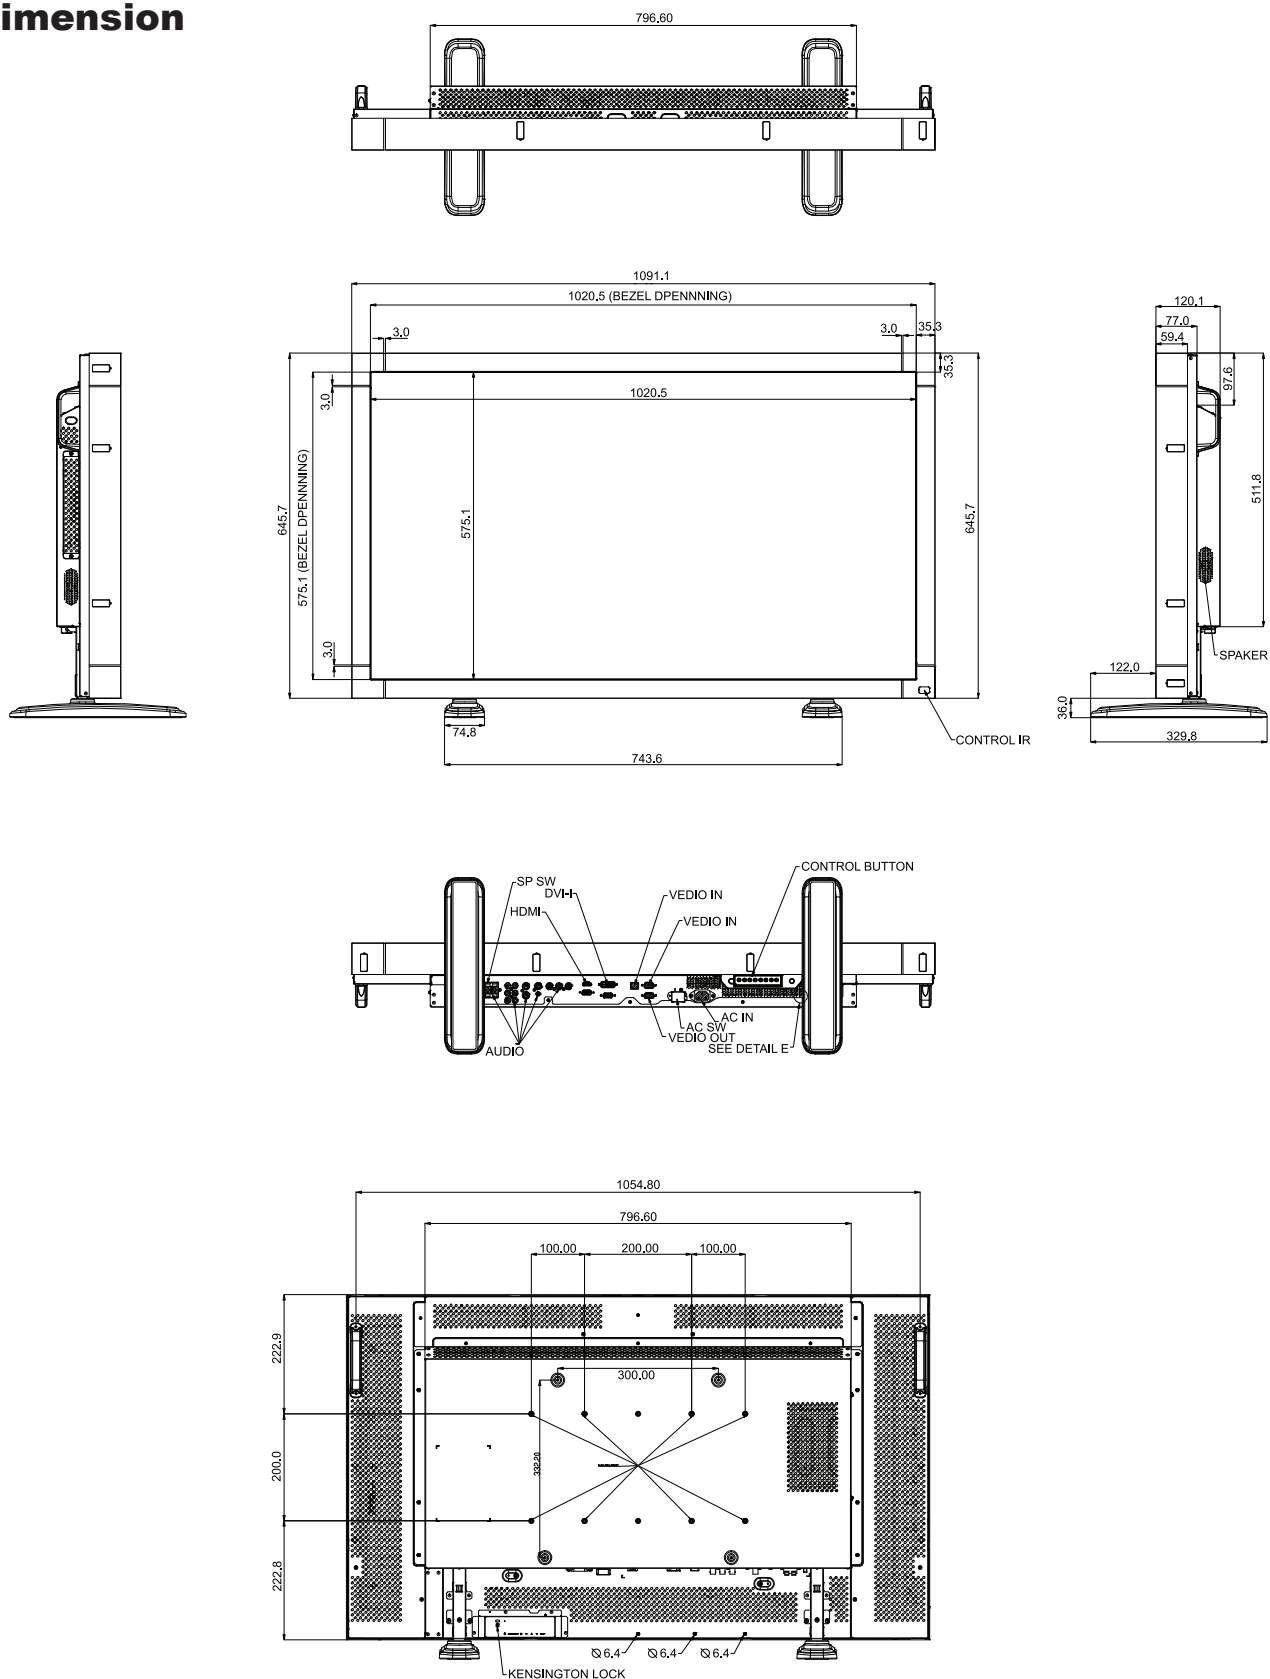

Rev.	Reasons	Revised Date
1.0	First release	Jan.05.11