

46" OPS Display VM460A-A-OFS)

Features

- 46 inch wide viewing angle display
- Support Resolution: 1920x1080
- Brightness 400cd/m²
- Compatible with OPS module
- Support Landscape & Portrait
- Open Frame designed



Front



Rear

*Note


This 46" OPS Display is compliant with OPS (Open Pluggable Specification) that is promoted by Intel. Based on OPS standard, this OPS Display can be inserted into any OPS module to satisfy customers' flexible requirements.

Model Name:VM460A-A-OFS

LCD Specification	Viewable Size Image	46" (16:9)
	Active Area (mm)	1018.08 x 572.67
	Pixel Pitch (mm)	0.53025 (H) x 0.53025 (V)
	Resolution	1920 x 1080
	Brightness	400 cd/m ²
	Contrast Ratio	4000:1 (typ.)
	Display Color	16.7M (8bit/colors)
	Viewing Angle	-89~89(H); -89~89(V)
	Frequency	Horizontal:15.625/15.734, 31.5~91.1KHz (Analog) / 31.5~91.1KHz (Digital) Vertical :50~85Hz (Analog)/ 50~85Hz (Digital)
	Touch Screen	SAW / Optical touch
Display I/O Interface (Input Signal)	PC	Mini D-sub 15pin DVI-D (with HDCP)
	Video	Composite (BNC type) Component (BNC x3) HDMI (with HDCP)
	Audio	RCA L/R: 2 Input Stereo Mini Jack: 1 input
	Control	D-sub 9 pin (RS232C) LAN (RJ45)
	OPS Slot	Yes
Display I/O Interface (Output Signal)	PC	Mini D-sub 15 pin
	Video	Composite (BNC type)
	Audio	RCA L/R: 1 Output Speaker Output: External SPK Jack 10W + 10W
	Control	D-sub 9 pin (RS232C)
Power Requirement	Power Input	110~240 AC-in
Physical Characteristics	Dimension (W x H x D)	1124.4 x 676 x 112.1mm
	Weight	26KG
Environment	Operating Temperature	0~45° C
	Operating Humidity	20%~80% (without condensation)
Mounting	VESA mounting	200 x 200mm/ 400 x 200mm
Security Lock	Kensington Lock	Yes
Certification	Electromagnetic	CE, FCC, CCC
Option	Table Stand	Yes

46" OPS Display VM460A-A-OFS

Dimension

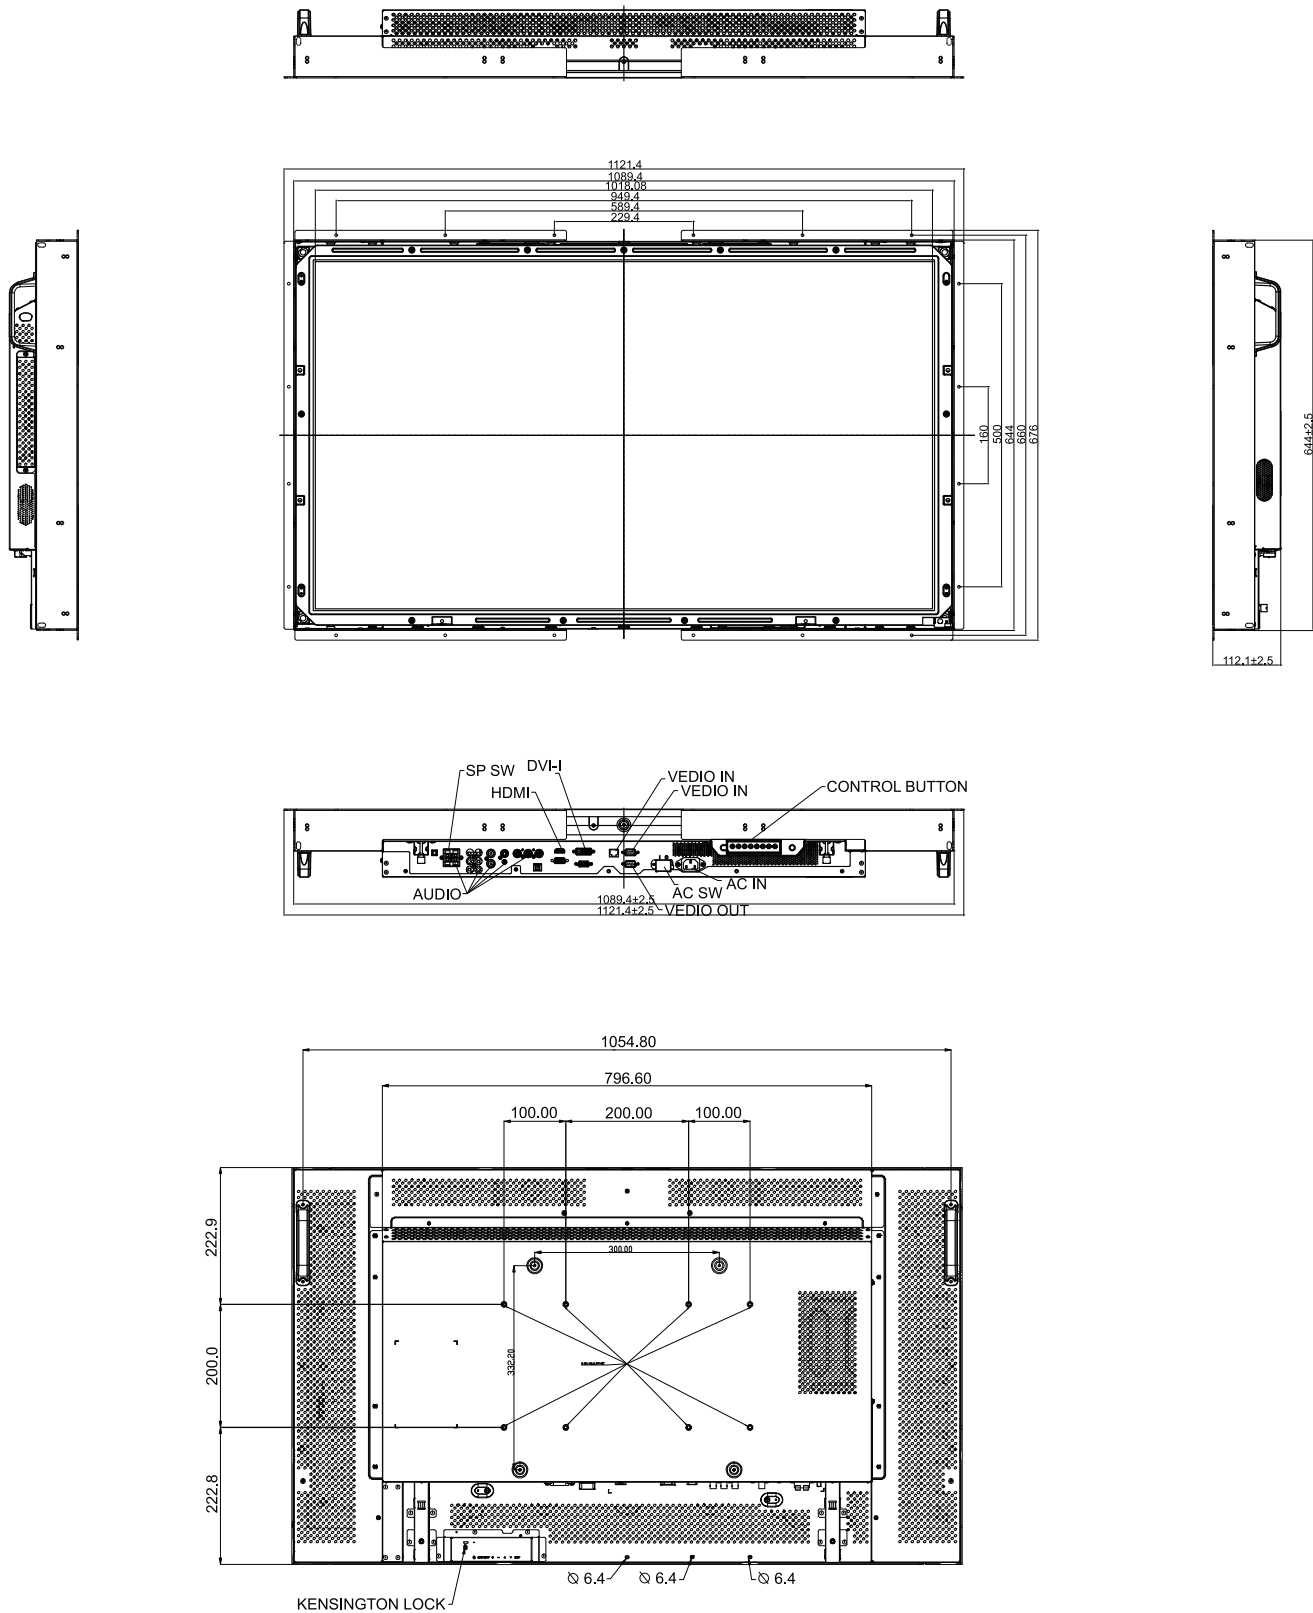

Rev.	Reasons	Revised Date
1.0	First release	Feb. 14. 12